

# EfficientLights | Surface Mount Linear LED Fixture

## EfficientLights Surface Mount Linear LED Fixture

**Product Description:** The EfficientLights Surface Mount Linear LED Fixture features a low-profile form factor, efficient-diffuser and high-performance LEDs – perfect for commercial, museum, retail and hospitality applications.

**Performance Summary:** Certified to UL 1598 | RoHS-compliant | Contains no lead or mercury | Suitable for damp locations

**Application:** Designed for use in shelf, valance, cove, under cabinet, accent and display case applications.

**Voltage:** 24v DC

**Dimmable:** See Power Supply

**Life:** 60,000 Hours (L70)

**Weight (oz.):** 15/ft.

**Lumens per Watt:** 85

**Power Supply:** Requires external power supply (sold separately)




Product Code	Power (Watts)	CCT (K)	Lumen Output	lm/W	CRI
CS/60/D/30K/2000	24	3000	2000	85	82
CS/48/D/30v/1600	19	3000 w/ VioLight	1600	85	82
CS/48/D/30K/1600	19	3000	1600	85	82
CS/36/D/30v/1200	14	3000 w/ VioLight	1200	85	82
CS/36/D/30K/1200	14	3000	1200	85	82
CS/24/D/30K/800	10	3000	800	85	82
CS/18/D/30v/600	7	3000 w/ VioLight	600	85	82
CS/18/D/30K/600	7	3000	600	85	82
CS/12/D/30K/400	6	3000	400	85	82
CS/60/D/30K/1000	12	3000	1000	85	82
CS/48/D/30K/800	10	3000	800	85	82
CS/36/D/30K/600	7	3000	600	85 </td <td>82</td>	82
CS/24/D/30K/400	5	3000	400	85	82

Housing Color: Aluminum


### Lamp Images




### Color Temperature

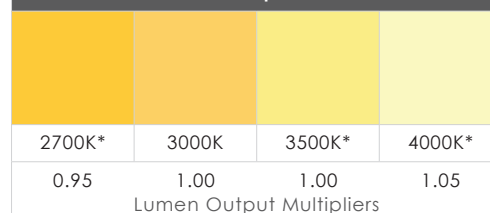

### Housing Colors

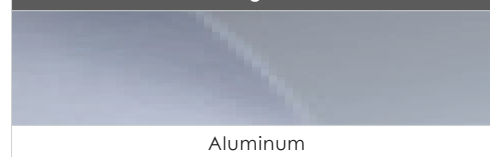

Nominal Length	Maximum Overall Length (MOL)
5'	59"
4'	47.125"
3'	35.125"
2'	23.125"
18"	17.25"
12"	11.25"
Lead Wire = >120"	

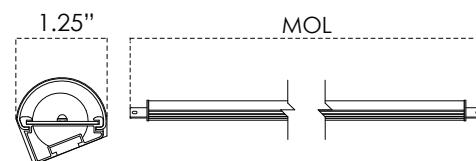

\* Made to Order